




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

INTERNATIONAL PATENT CLASSIFICATION ⁶ :		A1		(11) International Publication Number: WO 99/15995	
G06F 17/30				(43) International Publication Date: 1 April 1999 (01.04.99)	
(21) International Application Number: PCT/US98/20022				(81) Designated States: IL, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 23 September 1998 (23.09.98)					
(30) Priority Data: 08/936,111 23 September 1997 (23.09.97) US				Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: PENCOM SYSTEMS, INC. [US/US]; 40 Fulton Street, New York, NY 10038 (US).					
(72) Inventors: SHKLAR, Leon; Pencom Systems, Inc., 40 Fulton Street, New York, NY 10038 (US). MAKOWER, David; Pencom Systems, Inc., 40 Fulton Street, New York, NY 10038 (US).					
(74) Agent: RUBEN, Bradley, N.; Hopgood, Calimafde, Kalil & Judlowe, LLP, Suite 4000, 60 East 42nd Street, New York, NY 10165 (US).					

(54) Title: SYSTEM FOR INDEXING AND DISPLAYING REQUESTED DATA HAVING HETEROGENEOUS CONTENT AND REPRESENTATION

(57) Abstract

A system (820) and method provide flexible access to heterogeneous information from numerous sources (836, 840). This is accomplished without relocating the original data, by analyzing the data in its existing format and assorted locations, (835, 836) in order to discern the logical structure of the data, in terms of whatever units might be applicable for the specific type of data in question. The result is an object-oriented model of that data structure. The system (820) also allows for customization of the format for displaying the information, once the model has been constructed.

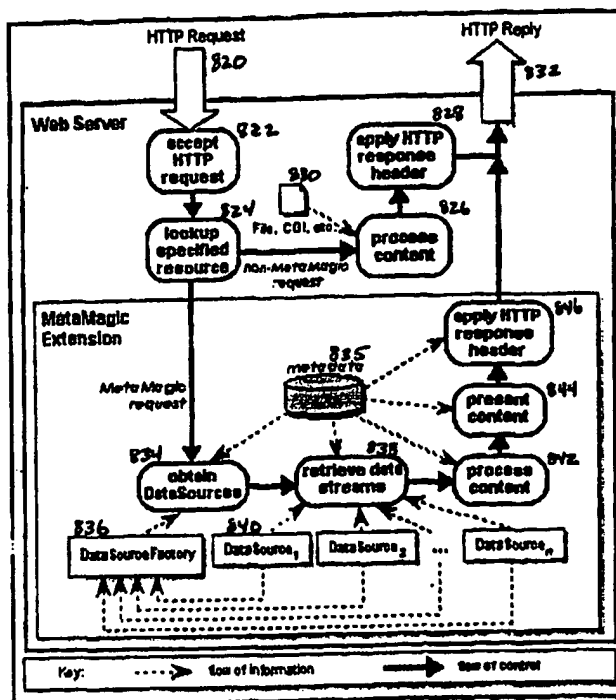

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SYSTEM FOR INDEXING AND DISPLAYING REQUESTED DATA HAVING HETEROGENEOUS CONTENT AND REPRESENTATION

Field of the Invention

5 The instant invention relates generally to a computerized system and method for providing flexible access to heterogeneous information from numerous sources. More specifically, the invention relates to a system for accessing and presenting data by creating an object oriented organization of the data that can be used to customize the format for displaying the
10 information in real time.

Background of the Invention

The explosion in recent years of the availability and use of the worldwide Internet has made available an almost limitless amount of information.
15 For corporations, this has meant that their internal computer networks, formerly difficult to expand and maintain, have become merely private corners of the vast Internet, making tremendous data available at every desktop. The World Wide Web and intranets continue to grow, and while it has become easier to make information available through such services,
20 it is often impossible to obtain access to exactly the right information in a desired form. For example, the recent proliferation of the use of browsers has created an instantaneous demand for information formatted in either HTML or other browser-readable formats. As is known, documents stored in HTML include embedded within the data formatting codes that tell the
25 ultimate browser how to display the information. For example, headers may be shown in bold, while chapter titles are displayed as hyperlinks to display other sections of the document or other documents. As a result of the demand for such document coding, organizations and individuals have devoted substantial effort and expense to the task of copying and
30 reformatting data that already exists on the Internet into HTML-coded information as a necessary step for making such information available via web browsers.

With corporations devoting millions of man-hours to duplicate and adapt corporate data into forms more suitable for presentation on a Web-based

Internet or Intranet or other network, multiplied data-maintenance costs and the proliferation of obsolete data are new problems created.

Specially coded/formatted data can quickly become obsolete when browser languages change or are improved by advances.

5 One possible, but unworkable, solution, is to simply display the documents in whatever format they are stored. Straight text is shown as straight text, for example. However, this display strategy loses the increased functionality and improved readability given by enhanced and/or customized formatting and hyperlinks. Further, displaying more complex
10 formatted data, such as word-processing and page-layout formats, would, in practicality, require running the programs that created them to achieved the look and layout particular to that program, or at the very least customized translators must be created to emulate those programs, an often impossibly complicated and cumbersome solution. Even when it
15 can be done, there are often problems of version control, unavailability of translating tools and inconsistent presentations.

Summary of the Invention

20 In view of the deficiencies of the prior art, it is an object of the present invention to provide a system that will display stored data in an enhanced and/or customized format, regardless of the formatting of the stored data.

25 It is a further example of the present system to provide a programming environment that allows for creation of objects to analyze and format stored data.

 It is another object of the present invention to provide a system that analyzes and pre-indexes stored data, without altering the data, to accomplish real-time generation of an enhanced and/or customized format presentation of the stored data for display.

30 It is a still further object of the invention to provide a system for formatting and displaying information that uses a graphical interface and language for controlling the indexing and display of stored data.

 The present invention is a system and method for providing flexible access to heterogeneous information from numerous sources. This is
35 accomplished without relocating the original data, by analyzing the data in

its existing format and assorted locations, in order to discern the logical structure of the data, in terms of whatever units might be applicable for the specific type of data in question (e.g., paragraphs, sections, articles, chapters, frames, etc.). The result is an object-oriented model of that data structure. The system also allows for customization of the format for displaying the information, once the model has been constructed. The data thus remains in its original location and format, but is presented through the system in a coherent, uniform format.

The resulting object-oriented model, a repository, contains objects, or resources, each in turn containing metadata that points to and describes a unit of the original data. The repository and the resources that comprise it are generated by a program, which itself is automatically created by the system from structure and type specifications previously defined. The type specifications define both the size and format of the subunits of the stored data. The structure specifications define how the subunits are to be grouped together for search, traversal, and presentation purposes. The smallest subunit (e.g., a single line of text, a paragraph, or a section) defined at this stage represents the smallest unit of information that can later be presented separately from other such units. The invention is also comprised of a visual language for inputting the structure specifications and automatically generating the metadata repositories. The system of the present invention also includes various agents for monitoring and maintaining the stored data to ensure that changes to stored data are notified and handled appropriately.

In more detail, the invention provides a system for displaying data from a source location at a display location via electronic networking, comprising: data desired to be displayed at the display location, the data having a predetermined format and accessible via a server at the source location of the data; a type specification particular to the data, the type specification defining both a format of the data and one or more instructions for extracting encapsulation units for the data, each of the encapsulation units defining a portion of the data for displaying at the display location; metadata identifying how to access the data and how to present the data at the display location, the metadata residing at one or more intermediate locations adapted to be in communication with both the

source and the display locations; template data for determining formatting of the data or an encapsulated unit thereof to be displayed at the display location; and means for processing the metadata to access and to retrieve the data or an encapsulated portion thereof, and for displaying the data or an encapsulated portion thereof at the display location.

In another embodiment, this invention provides A method for providing data for display at a display location remote from a source location at which the data is stored, the data being provided to the display location via electronic networking, the method comprising: providing data desired to be displayed at the display location in a predetermined format, the data accessible from the source location via a server at the source of the data; specifying, particular to the data, a type specification defining both a format for the data and one or more instructions for extracting one or more encapsulation units of the data to be displayed at the display location; generating metadata, the metadata residing on an intermediate server between the server at the source data location and the display location, the intermediate server adapted to be in communication with the display location, the metadata identifying how to access the data from the server at the data source and how to format the data for presentation at the display location; providing template data for determining the formatting of the data or an encapsulated portion thereof displayed at the display location; and processing means responsive to a user at the remote location issuing a command to display the data or an encapsulated portion thereof at the remote location, the processing including the step of generating the metadata and presenting the data or an encapsulated portion thereof for display at the display location.

In various other embodiments, the data can be defined by different type specifications, and multiple templates can be used for displaying the information differently (at the same display location, or differently at separate display locations). In its broadest sense, "data" should be understood to include text and mark-up language files, images (e.g., a still, or a video feed), executable code (whether compilable or interpretable), sound/audio feed, and modelling language files (e.g., VRML).

Brief Description of the Drawings

The foregoing and other objects and advantages of the present invention will become apparent to those skilled in the art upon reading the following detailed description of the preferred embodiment, in conjunction
5 with a review of the appended drawings, in which:

Fig. 1 is an overall schematic view of the system of the present invention;

Fig. 2 is a schematic view of stored data and its associated metadata;

10 Figs. 3a-3b are examples of browser output generated by the present system;

Fig. 3c is a portion of a presentation specification of the present invention;

Fig. 4 is a portion of a type specification of the present invention;

15 Fig. 5 is a portion of a structure specification according to the present invention;

Fig. 6 is a portion of metadata generated by the system of the present invention;

20 Fig. 7 is an overall logic schematic of the operation of the system of the present invention;

Fig. 8 is a logic schematic of a data request to the system of the present invention;

Fig. 9 is a representation of a visual structure specification of the present invention;

25 Figs. 9a - 9j are representations of various statements used in the visual structure specification of the present invention;

Fig. 10 is an example of browser output generated by a query of metadata;

30 Fig. 11 is an example of browser output generated by the system of the present invention;

Fig. 12 is a logic flowchart of the generation of agents according to the present invention;

Fig. 13 is a schematic chart showing the location of agents according to the present invention; and

Fig. 14 is a schematic diagram showing the operation of agents according to the present invention.

Detailed Description of the Preferred Embodiments

5 Referring now to Fig. 1, the system of the present invention is shown in the broadest overall schematic form. In operation, a user accessing the system from terminal 110 will be using a program that converts incoming data to information displayed on a screen (*i.e.*, CRT, LCD, or other type display device); preferably that program is a browser
10 that is capable of displaying information received with standard formatting codes, such as Hypertext Markup Language, or "HTML", although any standard format may be adapted similarly.

Requests for data to be displayed are sent by the user from the terminal 110 through any network 120, such as the global Internet or a
15 company's intranet, and received via the network's routing scheme at a system server 130. Located on the system server 130 are many of the components of the system described below, including the metadata which relates to stored data on remote servers, such as remote server 140. It is possible that stored data could also be located on a different portion of
20 the system server 130, or on multiple remote servers. There may also be multiple system servers, each having metadata and each being separately accessible. One or more of these system servers are intermediate servers because they lie in the path of communication between the display terminal and the server containing the data to be displayed.

25 In basic operation, the user's request is received by the system at the system server 130. The system will then retrieve the metadata for the requested stored data. Using the metadata as an index and formatting guide, the system reads subunits of stored data specified by the metadata and creates a data stream (*e.g.*, in HTML or other requested format) for
30 return to the terminal 110, at which the data is ultimately displayed. For the remainder of this description, HTML will be used as the example browser formatting language and HTTP as the communications protocol, although it is to be understood that any existing or developed language and protocol will work similarly.

Referring now to Fig. 2, the relationship between stored data and its associated metadata is shown by example. The three "documents" of stored data, represented at 210a, 210b and 210c, each contain discrete news items -- three items, two items and one item, respectively. Thus, a "document" can be a single piece of information or a set of pieces of information. Each news item in one of these documents in Fig. 2 is separated from adjacent items by a line of asterisks. An appropriate repository defines each news item as a separate metadata object 220. As determined by the user in a type specification described below, the system detects a blank line followed by a line of asterisks, and thus defines the separation of "adjacent" news items in a document. (For ease of explanation, the documents are shown in Fig. 2 as scrolls of paper so that separate subdocuments are physically adjacent to each other, but it is understood by those in computer sciences that these abstractions are an analogy for a database and its parts.) Based on a pre-compiled type specification, the system's encapsulation process causes each news item to be associated with an encapsulation unit. The type specification is defined to separate out the title of the news item so that it is stored as an attribute and later utilized by a presentation specification; for example, the title may be defined as the first portion after the asterisks, then a blank line, and then the body of the news item. As a display attribute in the type specification, the title can be offset in bold upon display.

The individual item metadata units 220 are then grouped according to their association in a virtual container 230 and stored together on the main server as a repository 240. As a repository, the stored metadata contains all the necessary information to retrieve and display the stored data news items 210 in any desired format. For example, all news items from a single day can be associated as a separate container 230 in the repository 240.

Stored data, such as the news items 210, need not be stored static data. For example, the remote "stored" data could be financial information that is constantly changing. In such a case, the stored data is a link, such as a Universal Resource Locator or "URL", to another remote server that will return the requested data (current stock price, volume, market data, etc.). Because the type specification is defined to expect a

certain format, identical to static stored data, the returned data should always be in that same format. The substantive "data" can be of any type that is transmissible over the network (or can be converted to transmissible data), including various types of computer data (e.g., mark-up language files, executable code, ASCII text, image files, financial data, etc.), audio and/or video, and the like, and so can be stored or real-time (or delayed).

It is also possible for an encapsulated unit to refer to another object of metadata, such as a repository, which in turn refers to other metadata objects or stored data. The system is therefore indexed recursively. The result is that the term "stored data" is referring to any data source, such as static data, dynamic data (such as the retrieved financial information), another metadata reference, index, etc. Repositories may also refer to repositories as resources, in addition to data resources.

Just as the system, when configured, can detect simple asterisks in a plain text file during encapsulation, it can also configured to detect complex organization codes (chapter, paragraph, page, etc.). If need be, for highly complex stored data, such as FRAME-MAKER files, the system includes pre-processors for the stored data for easier encapsulation (i.e., metadata-based indexing). The pre-processing may also have to be repeated upon presentation of the data.

For each type of stored data (text, Word files, WordPerfect files, etc.), the user must create a type specification, which is essentially a listing that defines the correspondence between any formatting codes or format (e.g., blank lines) in the stored data, encapsulation units, and metadata attributes. The creation and use of the type specifications is described more fully below.

The stored data must be encapsulated through content-descriptive and access-descriptive metadata before the system can ultimately retrieve the stored data and create an HTML formatted return data stream. It is contemplated that the encapsulation may occur at the time of the request, immediately followed by retrieval, but for efficiency and response time concerns, it is preferred that the encapsulation take place at a time before the request. The metadata is then stored until a request is received.

Figs. 3a-3b demonstrate the flexibility of the presentation system, in that stored data may be displayed in different formats without affecting the data itself. As can be seen in Fig. 3a, the stored data as displayed contains both titles and body text. Each title and associated block of text below 310 has been encapsulated according to the user's specification as described more fully below. In Fig. 3b, the user has requested display of the data in a hierarchical format, only showing the block titles 320 without the attached data. Each title 320 is shown as a hyperlink, which allows the user to retrieve the associated body text as desired. A "hyperlink" allows the user to jump directly to the desired section of the overall document by selecting the highlighted text, rather than having to scan down the entire straight text version that would be necessary without the encapsulation and system of the present invention. The manner in which the stored data is displayed is controlled by a presentation specification, such as shown in Fig. 3c.

Referring now to Fig. 4, a type specification for the example news items of Fig. 2 is shown. As can be seen in Fig. 4, the empty line, separator, and title are defined as they are expected to occur in the stored data. Of course, the type specification requires some foreknowledge of the expected format of the stored data. In practice, setting up an existing database for use with the present system requires a programmer to view the form of the existing data and then write the type specification based on the form found. In example in Fig. 4 (referencing the documents in Fig. 2), the body text is defined as all data after the title and before the separator. The stored data subunit "News_Item" defined in the type specification is defined therein as a title (\$Title) and its associated body text (\$Item_Body), with some empty lines. The last definition in the type specification sets the overall type (DEFINE ETYPE) as defined above as "News."

Fig. 4 shows a type specification, which serves as a basis for generating the compiled type specification. Fig. 5 shows a repository specification that is automatically generated by a structure specification (defined below). When interpreted by the system, the repository specification enables accesses to the stored data at the remote server and encapsulates the data according to the type and structure

specifications. The structure specification is described in more detail below. In this example, each news item consisting of a title and body text is encapsulated. As a result, for each news item, a single encapsulation unit is created containing the location and type of the stored data.

5 Fig. 6 shows a series of metadata entries for encapsulated news items. As can be seen in the figure, each metadata entry is associated with an encapsulation unit and has a machine name and directory location for the gross file containing the associated item of stored data. Additionally, the metadata shown in the figure contains the location within
10 the file (e.g., "%1" "%2" in Fig. 6) of each item. The metadata preferably is also generated to include the "name" of the associated unit of stored data, so that it may be easily indexed and searched, and thus displayed in index or table-of-contents style format with a hyperlink to the actual stored data.

15 Referring now to Fig. 7, the overall functional schematic of the system of the present invention is shown. Initially, before any requests for the stored data may be received and processed by the system, both the type and structure specifications must be defined and the stored data must be processed to generate metadata. Thus, at block 710, the type
20 specification is entered into the system for the particular format of the target stored data (e.g., as in Fig. 4). A type definition interpreter (block 720) generates a compiled type specification and adds it to a type library (block 730) that is maintained for all formats of stored data. Once the library is created, any data in a format previously defined in the library can
25 later be processed without creating another type specification for that particular format. The specification may also be used for data in a slightly different format than that for which it was originally created if the end result of the display is suitable.

30 To determine the structure of the repository, the user must also enter a structure specification (block 740), which will describe how to organize the encapsulated units of the stored data. The structure specification may apply to a number of items having any format, as opposed to the type specification, which applies to a particular format itself. This allows specific files to be displayed according to different
35 formatting choices, even though they may have been stored in a similar

format. The structure definition interpreter (block 750) then takes the structure specification, along with the compiled type specification to create metadata (block 760) for the stored data. Of course, the system must access that data during metadata generation through the system server (block 770; see item 130 in Fig. 1) to the remote server (block 780; item 140 in Fig. 1).

In use, the user accesses a browser (block 790) and enters an HTTP request for data, which is routed to the main server 770 including the present system. The server retrieves the metadata for the request which tells the server the location of the remote files and the location within the files of the requested data. The encapsulated stored data is retrieved and processed into HTML format, according to the metadata (which was generated according to the structure specification) and the presentation specification, and then returned to the display location for display via the user's browser.

One aspect of the present invention is the relationship between repositories and the resources referenced with the repositories. As background, when a user accesses a server directory through a web browser without specifying a specific file, the server will usually default to a file named "index.html" and return that file to the browser. The present invention includes an advanced default procedure, which allows for dynamic resources to be used as defaults and for parameterized defaults based on the state and history of access of the user. As discussed above, the generation of metadata for stored resources may also include references to particular attributes of the stored resources (e.g., title, body, etc.). The system of the present invention uses these stored attributes to determine the default resource to be returned to the user's browser. For example, information regarding the user can be transmitted to the repository, which will choose which file having selected attributes to return based on the information regarding the particular user requesting the data for display.

The information on the user may be passed to the repository in the URL that is transmitted to the system server. When the system server generates the HTML page and forwards it to the user, the URLs embedded in the page are generated to include information already

gathered about the user. The system gathers this information through requests sent from the user. For example, the type of data requested by the user, or the format of the data requested, is used to select which of the resources within the repository to return to the user. Of course, if no
5 information regarding the user is available, the repository is pre-programmed with a default resource to return.

Referring now to Fig. 8, further details of the operation of the main server is shown, specifically with reference to an HTTP request. Initially, an HTTP format request is received by the main server 130 (block 820),
10 which is accepted by the server (block 822). The system determines if the request applies to stored data for which metadata exists (block 824). If not, the request is processed (block 826) as with any standard HTTP request. That is, the file is retrieved (block 830), an HTTP response header to reroute the data back to the requestor is added (block 828),
15 and the HTTP reply is sent (block 832).

If metadata does exist for the requested data, the system retrieves the metadata (block 834), as well as information on the data sources, such as their location (blocks 835, 836). Based on the metadata, the system retrieves the requested stored data from the remote locations
20 (blocks 838, 840) and processes the encapsulated data by culling only the requested portions and translating them into HTML-formatted data (block 842). The HTML data is formed into an HTTP response (block 844) for reply to the user after the routing HTTP response header is added (block 846).

25 In addition to the components and functionality described above, the present invention also preferably includes a graphic interface and language for entering structure specifications for generating metadata. Fig. 9 shows a structure specification used to create the metadata for stored data files consisting of, for example, Supreme Court decisions.

30 As seen in Fig. 9, the various icons used are declared first, since the definition language is a high-level language. Each variable is represented by an icon together with its name. Shape and color provide easy distinctions between different variables. Set objects (those referring to multiple items at once) are indicated by a stack of icons, as seen in
35 Fig. 9a. The statement sequence is represented by a rectangle, which is

subdivided into smaller rectangles for individual statements. Various statements may be used in the graphical definition, as follows:

The assignment statement assigns a value to a variable. Values are defined by expressions, which range from constants or other variables to complex expressions. The example shown in Fig. 9b shows the empty set being assigned to the variable "Processed." This would be used, for example, to initialize a variable to the empty set.

A variant of the assignment statement is the add-to-set statement illustrated in Fig. 9c, which is graphically indicated by the double arrow. The variable on the right-hand side must be a set variable, which is then added to the set on the left side as an additional element. If the right-hand-side expression is set-valued, as shown in Fig. 9d, the set is added to the set variable.

The forall statement illustrated in Fig. 9e provides selective access to set members. In this example, forall-body is executed for every element contained in the "ItemSet" which is not contained in the set accumulated in the variable "Processed." For each iteration, the element of "ItemSet" is assigned to the variable "PrmItem".

The write statement illustrated in Fig. 9f is used for storing generated metadata entities, in this example, the variables "ItemSet" and "CaseSet". Eventually, the stored metadata entities build up the information repository (block 240, Fig. 2).

The encapsulation expression illustrated in Fig. 9g creates simple encapsulation units by analyzing the stored data. In this example, objects of the type "Court" are built from the contents of the given remote directory. The type specification "Court" and its icon are preferably defined outside of the visual programming language. In the example of Fig. 9g, the "Court" units encapsulate multiple files related to the same case.

A variant of the encapsulation expression, illustrated in Fig. 9h causes metadata objects to be built from other metadata objects, providing a different formatted view of the same data.

Using the combine-expression statement illustrated in Fig. 9i, containers are created combining metadata units with other metadata units, or even references to metadata units (using the recursive ability of

the system). In the example shown, the repository created by the encapsulation expression is combined with encapsulation units contained in the set variable "CaseItems."

5 The index expression creates repositories that contain a set of references to other encapsulation units and containers and to a searchable index. In the example shown in Fig. 9j, a repository is built from the contents of the set variable "CaseSet," building a new index at the given file location. "LSI" represents what type of pre-defined indexing scheme should be used. In this preferred example, Latent Semantic
10 Indexing is used.

The example program shown in Fig. 9 incorporates many of the statements discussed. Functionally, the program performs the following:

1. Creates encapsulation units that encapsulate individual opinions (one per file). The type specification is preferably defined such
15 that the case numbers for the opinions are stored as attributes of the encapsulation units.
2. For each encapsulation unit created, other units related to the same case are found, grouped together into a container using the reference "Case," which refers to the type specification of the same name
20 and excluded from further encapsulation. Preferably, the presentation specification generates internal hyperlinks to individual opinions and external hyperlinks to related information, such as justices' biographies, etc.
3. Create an indexed container using the commercial LSI
25 technology or any other indexing technology.

Specifically referring to the program lines in Fig. 9, the first statement (at 910) serves to encapsulate individual opinions located at the input file location and assigns the generated set of encapsulation units to the variable "ItemSet." The type specification is "Court," which is pre-
30 compiled before encapsulation based on that type can occur. The next two statements (at 920), initialize the "Processed" and "CaseSet" variables. "Processed" is used to accumulate repositories from "ItemSet" that should be excluded from further encapsulation, while "CaseSet" is used for grouping units that belong to the same cases.

Next, the forall-statement (at 930) iterates over the units in "ItemSet" and uses the "Processed" set as a reference to avoid assembling the same case repeatedly for every member opinion. Units that are related to the same case are determined using the "CaseID" attribute, which is set by the type specification "Court." All objects related to the same case are grouped into a repository using the type specification "Case." The combine operation (at 940) then creates further repositories that include all case-related units and contain references to units encapsulating individual opinions. When all opinion units are grouped together, an index repository (at 950) is created for units in "CaseSet" and the repository is assigned to the "LSIColl" variable.

Fig. 10 shows a Web page that is generated by the system after searching for decisions using specific keywords using the index referenced by the repository "LSIColl." The result of the query is a list of the members of the set in "CaseSet." Since each member is a repository, we see not only a hyperlink for its content, but also hyperlinks for individual opinions. The dynamic Web page for the case unit which is referenced in the first hyperlink of Fig. 10 is shown in Fig. 11.

Another aspect of the invention is the system's ability to monitor the integrity of the data stored at various remote servers. The system uses remote agents, or programs, associated with remote servers that store data depended upon by other servers. These agents keep track of the files or metadata resources on these servers. These agents then independently monitor the metadata-indexed files and send out notifications about modifications to those files. In this way, system resources are only used by the agents when a metadata indexed file or metadata resource is modified on a remote server.

The agents are applications running on the system and remote servers that respond to requests for notification of changes to stored data files or metadata resources on that server. There are preferably three types of agents, as described below. First, a data agent keeps track of the data files on each machine containing data referenced by metadata in a repository server. Second, a repository agent, which is associated with a server having metadata, responds to requests regarding logical resources instead of actual referenced data (which is tracked by data

agents). The third type of agent is the surrogate agent that is used when a particular remote server with data or resources does not have a data agent. The surrogate agent checks the files on servers without agents by polling those servers to periodically check if the stored data files have changed.

Referring now to Fig. 12, the agent creation process is shown schematically. Preferably, when the metadata is created, the repository agent sends a request to an agent on the server containing the files or metadata resources. If an agent is already present, it receives the request for notifications and records it for later use, described more fully below. If no agent is present, the repository agent will attempt to forward the mobile code for an agent to the remote server. If the agent mobile code is accepted, the agent begins running on that remote server with the server that created it recorded for future notification. If the mobile code is not accepted, the repository agent records in its own database that the surrogate agent must be used to poll the remote server whenever those files or resources are needed. It is not necessary to run agents at all with the system of the present invention, but the record-keeping task of which data and resources have been modified or moved will be a much more difficult task.

In Fig. 12, at block 1210, the request to generate metadata is received by a system server of the present invention and executed. As the metadata file or files are created, a repository agent is created by the system at the system server (block 1220). As each remote server is identified as having stored data or resources matching the request specifications, the system sends a request to that remote server (block 1230). If a data agent is already present on the remote server (block 1240), the repository agent is recorded in the data agent's database as a notification target for specific files or resources on the remote server (block 1250). If no data agent is present (block 1240), the repository agent attempts to forward a data agent to the remote server, by using mobile code (block 1260). Of course, if the system of the present invention does not, for example, have the appropriate privileges with the remote server, no data agent mobile code is forwarded and the surrogate agent will have to poll that server (block 1270). At block 1280, assuming

a data agent is available, as each file containing stored data or metadata resources is located, the data agent on that remote server records the requesting repository agent for future notifications.

5 Once available, the data agents, as programs running in the background on each remote data server, then include a list of each referenced file on its associated machine and the repository agents that relate to metadata for those files. Preferably, this list may be maintained through the use of an associated database table, but any alternative storage location for the list will work similarly. Whenever a file or
10 resource listed in the agent's database list is modified, the agent forwards a notification to each of the repository agents which sent a request when generating metadata. The stored resource may then be modified, or other actions taken (such as automatic regeneration of the metadata by the repository).

15 If a surrogate agent must be used because no data agent exists on the remote server and mobile code could not be forwarded, the network bandwidth and server resources that must be expended to poll the remote server are much greater than the bandwidth and resources used by a data agent. As the use of systems and servers according to the present
20 invention grows, those remote servers that refuse to host a data agent will be more and more frequently polled by the surrogate agents, wasting system resources and encouraging the remote server administrator to allow a data agent to run on its server.

Each data agent is only related to files in its local file system and
25 then only the file statistics stored by the operating system. For example, the data agents do not store information about the type or contents of the individual files. Instead, the data agent keeps track of such information as file length, date last modified and directory/machine location. To gather modification information, the data agent preferably does not rely on the
30 operating system itself, as most current operating systems lack integrated notification mechanisms. Instead, the data agents periodically poll all associated file objects to see if they have been changed, created, deleted, etc., and if so, to forward notification to the repository agent associated with the requesting server.

A repository agent maintains a list of resource specifications by sending notification requests to other agents that maintain resources referenced in the specifications. It also tracks changes to local resource specifications because these specifications may be referenced by objects
5 in other repositories with notification of those specifications requested by those other repositories. If changes were not locally tracked, they could easily propagate and affect a multitude of other resources. The "other" agents that receive requests from a repository agent may be either data agents or, in turn, other repository agents due to the recursive ability of
10 the system. The resources may be either local or remote. When any stored data is changed, it is discovered first by the associated data agent and is then propagated through a chain of repository agent notifications. Each repository agent determines whether the change involves updating a content-based index, resource reference or other information.

15 For remote servers that have no data agent and will not accept mobile code, surrogate agents are preferred. Regardless of the computer's capabilities or accessibility, these agents poll via the network the remote servers assigned to them and retrieve status information on the remote physical resources. Surrogate agents are not particularly
20 efficient, but they do add to the system's functionality to handle the absence of server-side agents. Surrogate agents may also be used to track files that are local to a client's computer/terminal.

A request from a repository agent may be formatted with any combination of notification parameters, as well as notification frequency
25 and other client-specific requirements. For example, if it is only desirable to be notified if a file has been modified in the last 24 hour period, it would be wasteful of server resources if the agent were activated every five minutes to poll its associated stored data or resources.

Referring now to Fig. 13, a schematic diagram of a portion of a
30 network containing a central server 1310 and remote servers 1320a, 1320b is shown. The central server 1310 includes a metadata repository 1325 relating to the stored data on the several servers. A repository agent 1330 monitors the metadata repository 1325 and also communicates directly with data agents 1335 on those remote servers
35 1320a that include them. As shown, it is possible to have more than one

data agent 1335 running on a single remote machine 1320a, as more than one server 1340 may exist on that machine.

The repository agent 1330 also communicates with a surrogate agent 1345 running on the central server. The surrogate agent 1345 monitors stored data 1340 on the remote server 1320b without its own data agent, as well as the data 1350 stored locally on the central server. Accessing the metadata is accomplished preferably through an HTTP server 1355 running on the central server, which also sends requests to the repository agent 1330.

The functional schematic of processing a request to a data agent is shown in Fig. 14. At block 1405, the repository agent ("RA") 1410 generates a request and forwards it to the data agent ("DA") 1415 on a remote server (block 1420). To forward the request, the repository agent preferably uses a POST message to the associated http server. At block 1425, the http server receives the POST message, analyzes the URL, and determines that the message should be processed by the data agent. The body of the message is passed to the data agent without additional processing.

At block 1430, the data agent receives the message, parses it, adds the transmitted request to its internal notification request list and decides whether a reply is needed (for example, if the reply was requested). At block 1435, the data agent, after scanning its registry for modifications to files associated with the received request, generates and forwards a reply back to the http server. The preferred implementation uses multiple threads, so the data agent passes the reply to the thread, which is responsible for sending it back to the http server. At block 1440, the http server returns a reply back to the repository agent on the central server (block 1445).

The surrogate data agent functions similar to the individual data agents, and sends similar replies to the repository agent. Preferably, the agents send messages and notifications using http socket connections. However, it is contemplated that e-mail messages may be used similarly.

In another embodiment, at the display location the system administrator (for example) can often set various security levels (*i.e.*, levels of access) for use of the system. As noted above, depending

upon the user's characteristics, the system can retrieve and display information in a form dependent upon the particular user. Using two or more security levels, this invention can thus return certain portions of the data to the user at the display location depending upon that particular user's security access level. In this way, the same source data could be used for all users at the display location, but different parts of that data are displayed at the display location so that users with a lower level of access (less security) can be shown less information than a user with a higher security clearance. It should be appreciated that the "display location" may include multiple display terminals, and users at those terminal may have different security levels assigned to them. This invention thus allows the same source data to be available for all of those users, while the metadata or template determines, based on the user's preferences and/or security level, what any particular user sees at the display terminal.

Thus, it can be seen that the system of the present invention and its various embodiments are fully capable of achieving the above-mentioned and other objects and advantages of the present invention, although not every embodiment need meet every object and advantage.

While the embodiments shown and described are fully capable of achieving the objects and advantages of the present invention, it is to be understood that the above embodiments are shown merely for the purpose of illustration and not for the purpose of limitation, the invention being only limited by the claims, as follows:

What is claimed is:

- 1 1. A system for displaying data from a source location at a display
2 location via electronic networking, comprising:
 - 3 a. data desired to be displayed at said display location, said
4 data having a predetermined format and accessible
5 via a server at the data source location;
 - 6 b. a type specification particular to said data, said type
7 specification defining both a format of said data and
8 one or more instructions for extracting encapsulation
9 units for said data, each of said encapsulation units
10 defining a portion of said data for displaying at said
11 display location;
 - 12 c. metadata identifying how to access the data and how to
13 present the data at said display location, said
14 metadata residing at one or more intermediate
15 locations adapted to be in communication with both
16 said source and said display locations;
 - 17 d. template data for determining the formatting with which said
18 data or an encapsulated unit thereof is displayed at
19 said display location; and
 - 20 e. means for processing the metadata to access and to
21 retrieve said data or an encapsulated portion thereof,
22 and for displaying said data or an encapsulated
23 portion thereof at the display location.
- 1 2. The system of claim 1, wherein said data includes data defined by
2 different type specifications.
- 1 3. The system of claim 1, comprising two or more templates.
- 1 4. The system of claim 1, further comprising means for displaying
2 said data at said display location via a protocol selected from the group
3 consisting of hypertext transfer protocol (HTTP), file transfer protocol
4 (FTP), Internet Inter-ORB protocol (IIOP), LDAP, Distributed Component
5 Object Model (DCOM), Z39.50, and a combination thereof.

1 5. The system of claim 1, wherein an encapsulation unit refers to
2 one or more other encapsulation units.

1 6. The system of claim 1, further comprising a library of type
2 specifications.

1 7. The system of claim 1, wherein the processing means presents
2 the source data to the display system as a mark-up language file, image,
3 executable code, video, audio, plain text, modeling language file, or a
4 combination thereof.

1 8. The system of claim 7, wherein the mark-up language is hypertext
2 mark-up language (HTML) or extensible mark-up language (XML).

1 9. The system of claim 1, wherein metadata is displayed at the
2 display location.

1 10. The system of claim 1, wherein the metadata also identifies the
2 type specification.

1 11. The system of claim 1, further comprising two or more security
2 levels for accessing data at said display location and displaying said data
3 according to the security level of the user at the display location, wherein
4 the security level of the user at the display location determines the data
5 displayed at the display location.

1 12. A method for providing data for display at a display location
2 remote from a source location at which the data is stored, the data being
3 provided to the display location via electronic networking, the method
4 comprising:


- 5 a. providing data desired to be displayed at said display
6 location in a predetermined format, said data
7 accessible from the source location via a server;
- 8 b. specifying, particular to said data, a type specification
9 defining both a format for said data and one or more
10 instructions for extracting one or more encapsulation
11 units of said data to be displayed at said display
12 location;
- 13 c. generating metadata, said metadata residing on an
14 intermediate server between said server at the source
15 location and said display location, said intermediate
16 server adapted to be in communication with both said
17 servers at the source location and at the display
18 location, said metadata identifying how to access the
19 data from the server at the source location and how
20 to format the data for presentation at said display
21 location;
- 22 d. providing template data for determining the formatting of
23 said data or an encapsulated portion thereof
24 displayed at said display location; and
- 25 e. processing means responsive to a user at said remote
26 location issuing a command to display said data or an
27 encapsulated portion thereof at said remote location,
28 said processing including said step of generating the
29 metadata and presenting said data or an
30 encapsulated portion thereof for display at said
31 display location.

1 13. The method of claim 12, further comprising generating a type
2 specification that references the format of the data, the encapsulation
3 units of the data, and the metadata display attributes for the data.

1 14. The method of claim 12, wherein multiple templates are provided.

1 15. The method of claim 14, wherein there are a plurality of display
2 locations and said data is displayed concurrently via plural display
3 templates at each of said plural display locations, .

1 16. The method of claim 11, further comprising the steps of
2 (i) providing two or more security levels for accessing data at said display
3 location and (ii) displaying said data according to the security level of the
4 user at the display location, wherein the security level at the display
5 location determines the data displayed at the display location.

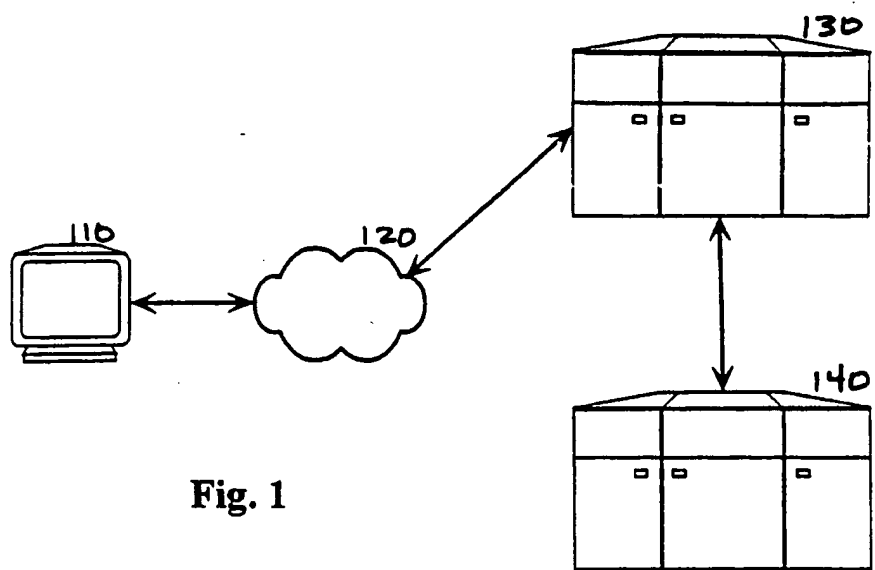**Fig. 1**

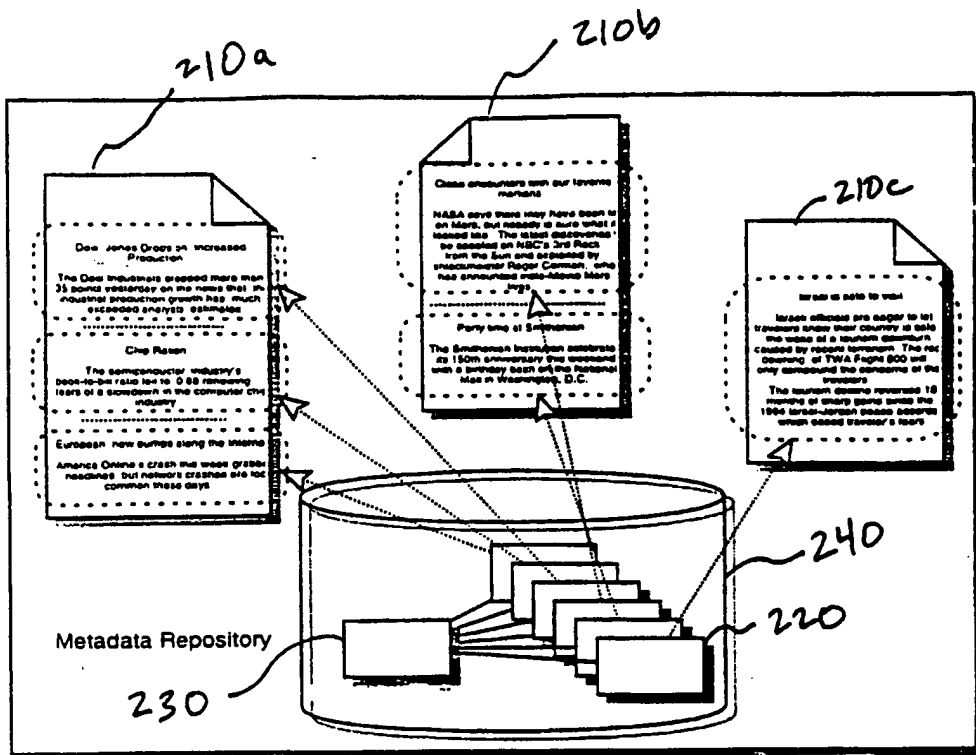


Fig. 2

```

BEGIN;
  TYPE INDEX   WAIS;
  TYPE         News;
  VAR IHO      Index;
  VAR SET IHO  Item_Set;

  Item_SET = ENCAP News "/u/leon/news";
  Index = INDEX WAIS Item_Set "/u/leon/db/News";
  WRITE Index, Item_Set;
END;

```

Fig. 5

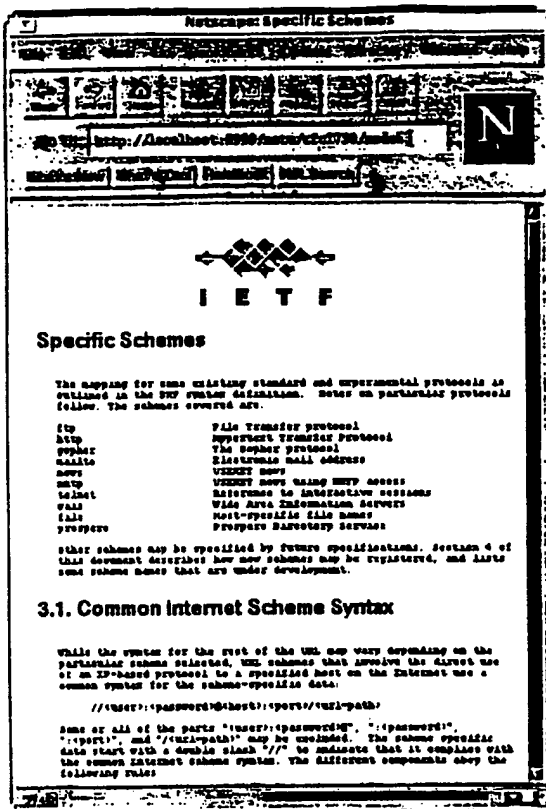


Fig. 3a

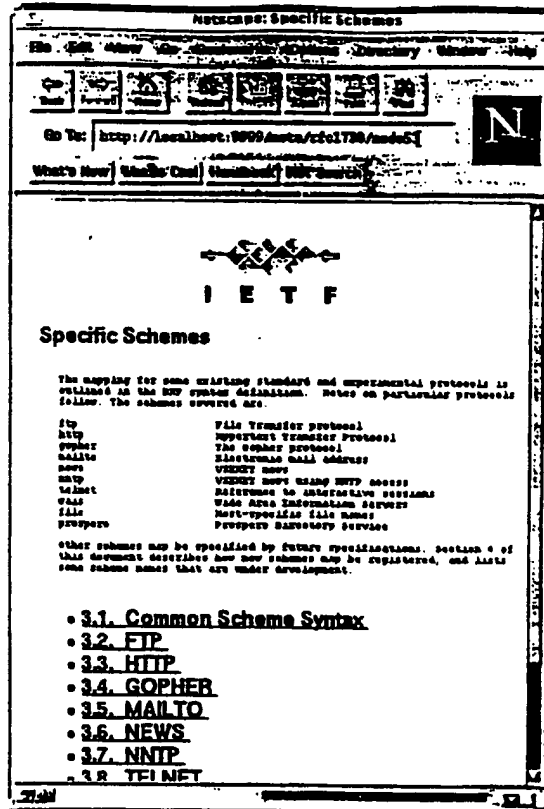


Fig. 3b

```

<HTML>
<HEAD>
<TITLE>rfcListFrame</TITLE>
<BASE TARGET="rfcRightFrame">
</HEAD>

<BODY BGCOLOR="#66CCFF" LINK="#FF0000" VLINK="#FF0000">

<P>
<H3 ALIGN="CENTER">
<!--#MM BACKLINK
    TARGET="rfcRightFrame"
    RESOURCE="self"
    PARAMS="template=rfcRightFrameTemplate.html
            &content=concat,listAll"-->
<!--#MM ATTRIBUTE NAME="label"-->
<!--#MM /BACKLINK -->
</H3>
<HR>
<FONT SIZE="2">
<!--#MM PRESENT
    RESOURCE="self"
    TYPE="INLINE"
    PARAMS="template=rfcRightFrameTemplate.html
            &content=skip,list(concat,listAll)" -->
</FONT>
</BODY>
</HTML>

```

Fig. 3c

```

DEFINE MATCH Empty_Line ^\s*$;
DEFINE MATCH Separator ^\*\*\*\*\*+$;
DEFINE MATCH Title ^([^\n]+\n)+ AND NOT $Separator;
DEFINE MATCH Item_Body UNTIL $Separator;

DEFINE MATCH News_Item
    ($Empty_Line)* ($Title) ($Empty_Line)+ $Item_Body;

DEFINE ETYPE News FROM ASCII_Encap
    BODY SELECT $News_Item sequence() $2;

```

Fig. 4

```

begin;
    objectID = "808061e8:ftp://latte/News/tech_072996%1";
    objectType = "TXT:news";
    location = "ftp://latte/News/tech_072996%1";
    name = "Close encounters with our favorite marsians";
end;
begin;
    objectID = "808061e8:ftp://latte/News/tech_072996%2";
    objectType = "TXT:news";
    location = "ftp://latte/News/tech_072996%2";
    name = "PArty time at Smithonian";
end;
begin;
    objectID = "808061e8:ftp://latte/News/world_072996%1";
    objectType = "TXT:news";
    location = "ftp://latte/News/world_072996%1";
    name = "Israel is safe to visit";
end;

link;
    parent = "808061e8:/home/leon/mm/db/News:wais";
    child = "808061e8:ftp://latte/News/money_072996%1";
end;
link;
    parent = "808061e8:/home/leon/mm/db/News:wais";
    child = "808061e8:ftp://latte/News/money_072996%2";
end;
link;
    parent = "808061e8:/home/leon/mm/db/News:wais";
    child = "808061e8:ftp://latte/News/money_072996%3";
end;

```

Fig. 6

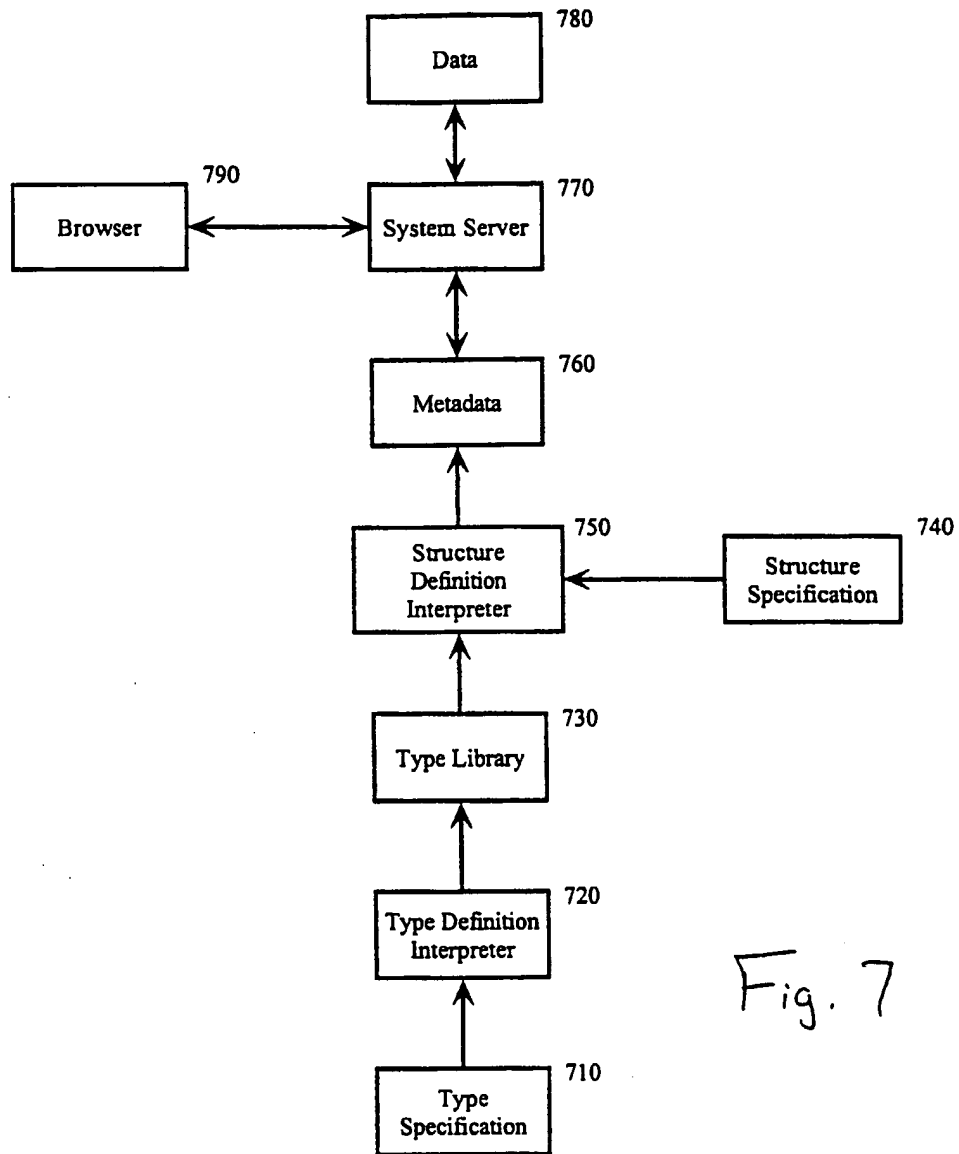


Fig. 7

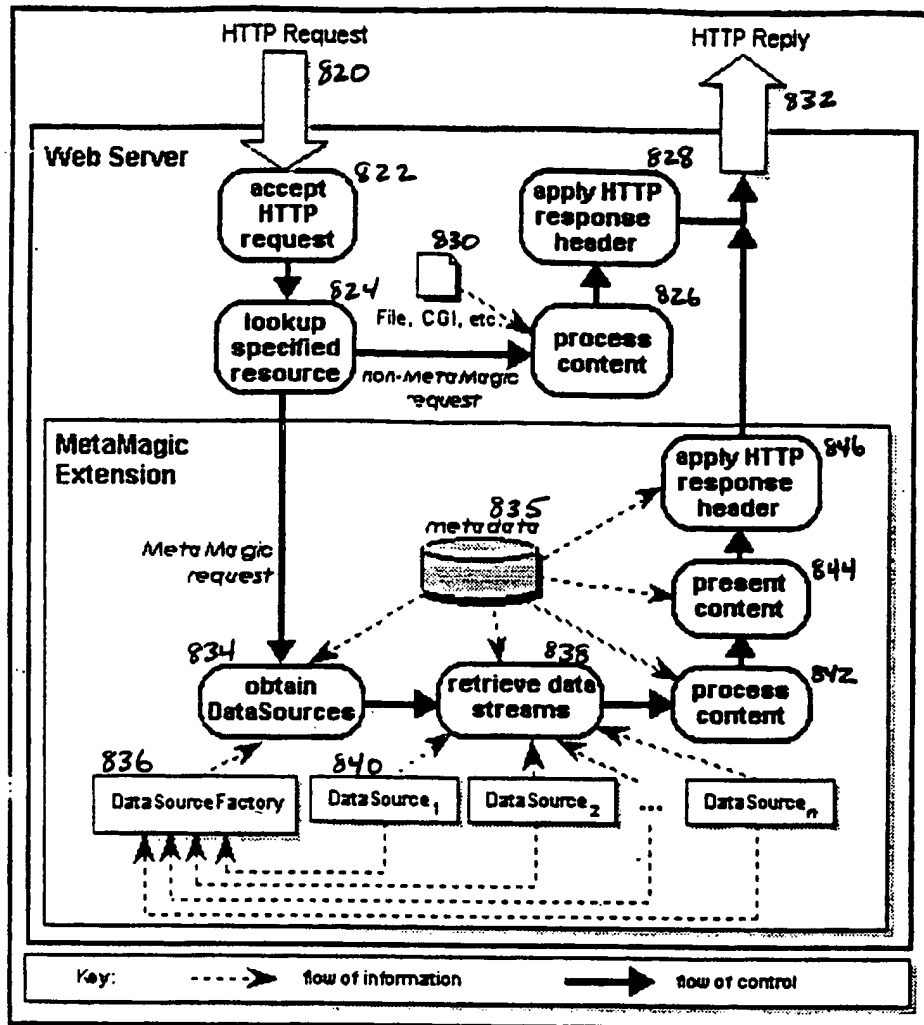


Fig. 8

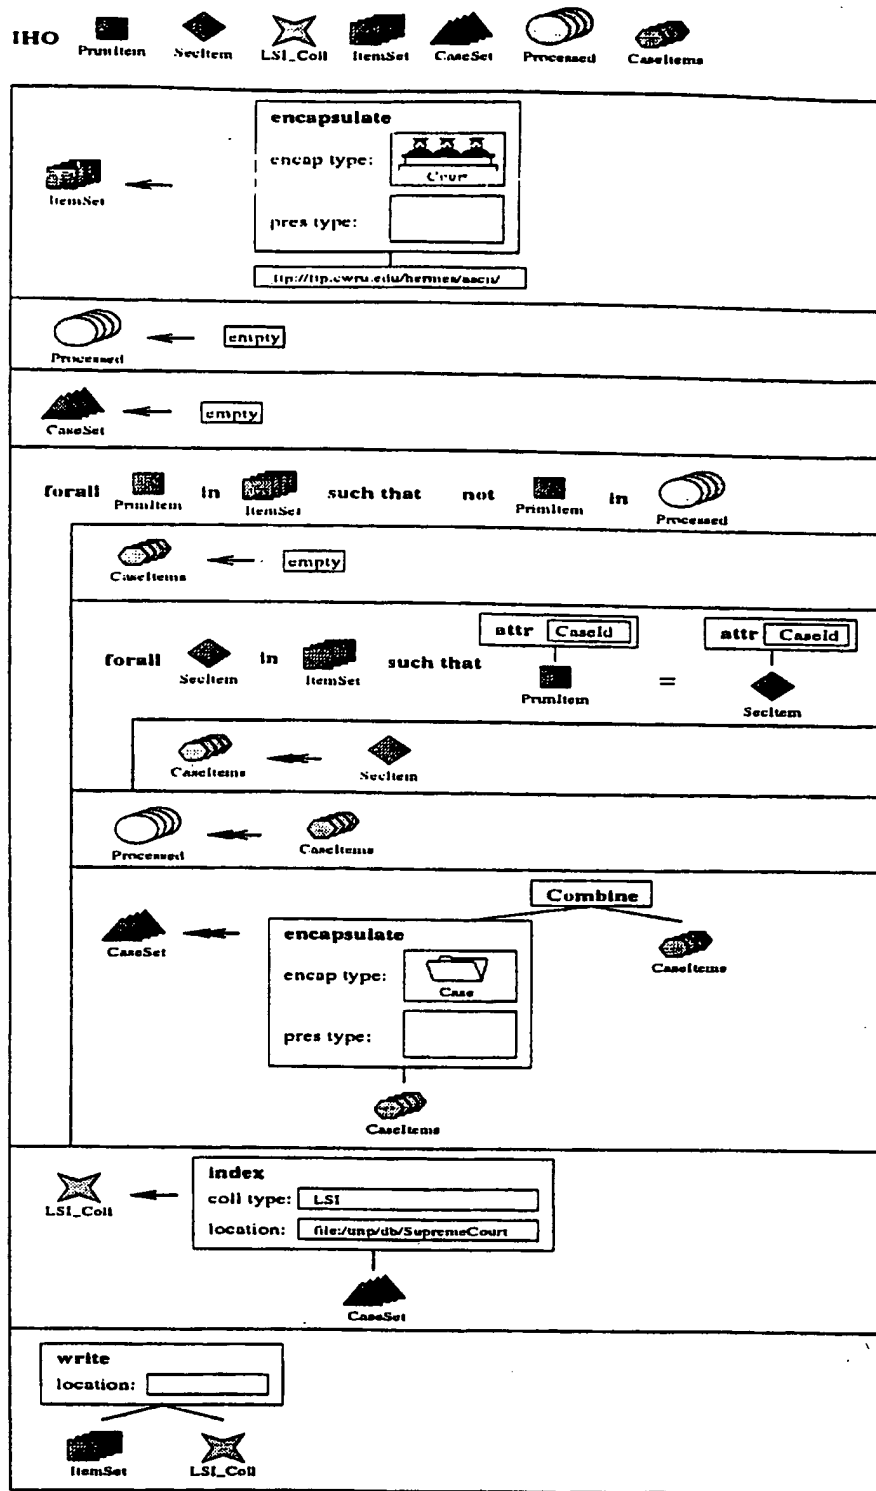


Fig. 9

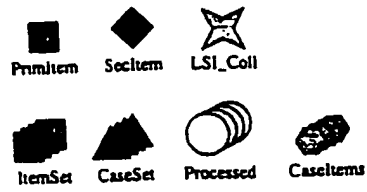


Fig. 9a




Fig. 9b



Fig. 9c



Fig. 9d

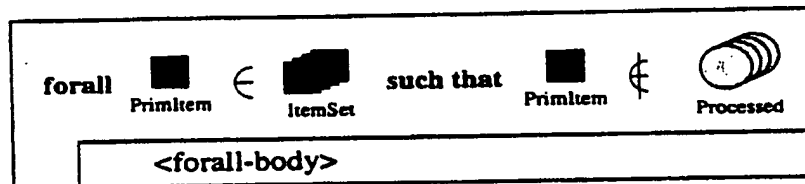


Fig. 9e




Fig. 9f

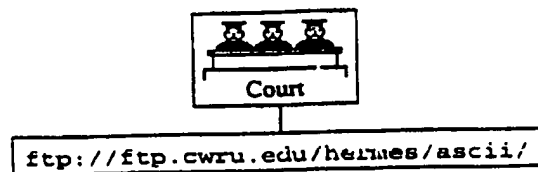


Fig. 9g



Case



CaseItems

Fig. 9h




Fig. 9i

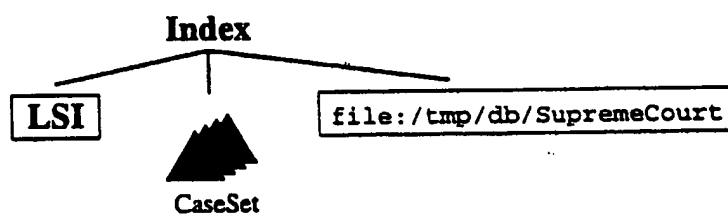


Fig. 9j

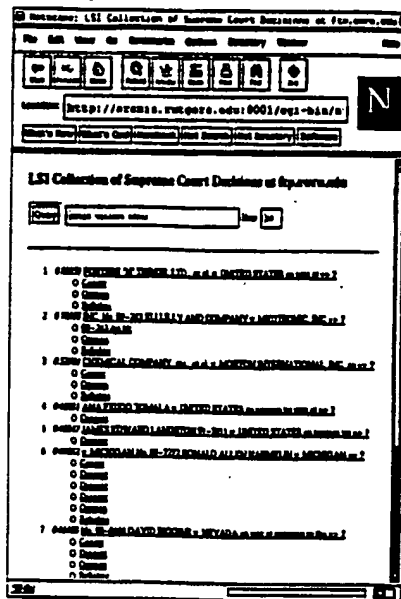


Fig. 10

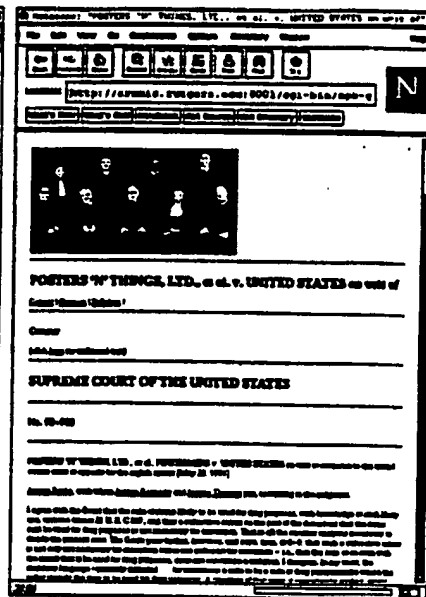
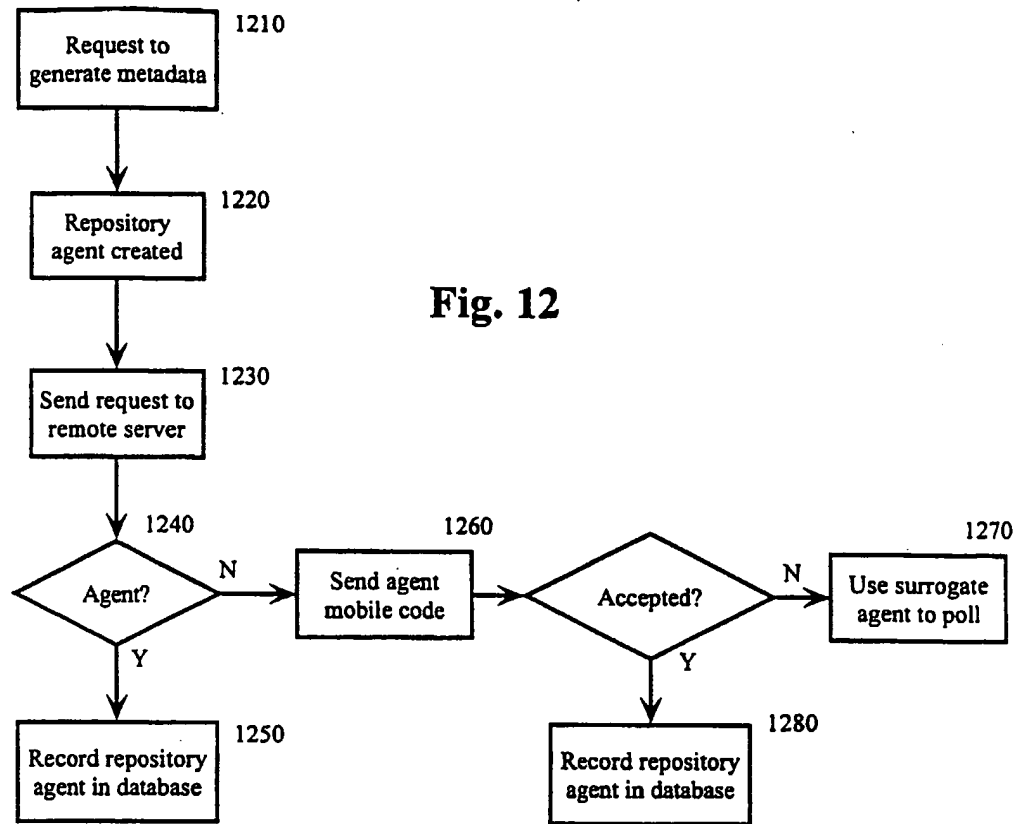


Fig. 11

Fig. 12



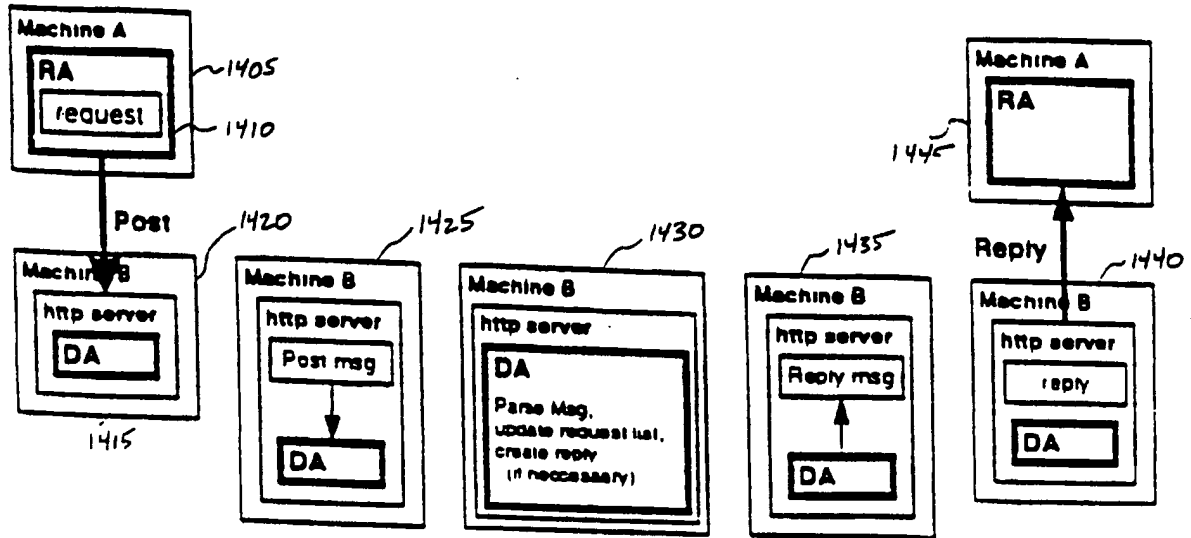


Fig. 14

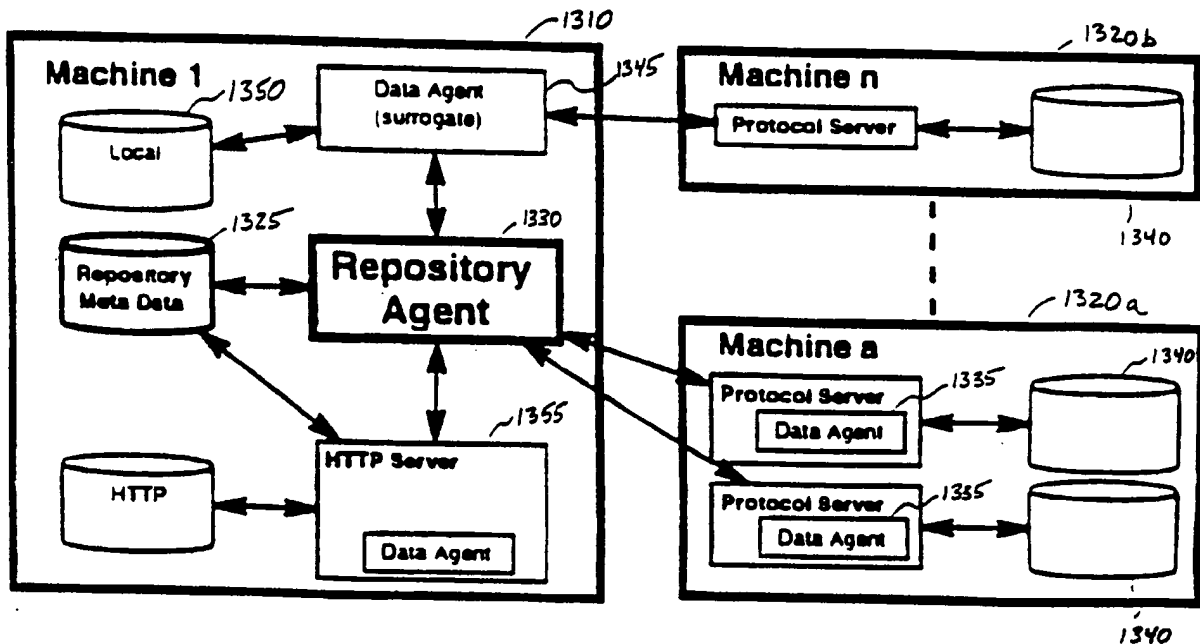


Fig. 13

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US98/20022

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : G06F 17/30 US CL : 707/202, 102; 395/200.33, 200.49 According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 707/202, 102; 395/200.33, 200.49 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT														
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
Y,P	US 5,799,310 A (ANDERSON et al.) 25 August 1998, col. 5, line 24 to col. 8, line 36.	1-16												
Y,E	US 5,832,512 A (MASTORS et al.) 03 November 1998, col. 2, line 38 to col.3, line 61, col. 4, line 24 to col. 6, line 46.	1-16												
A,P	US 5,790,793 A (HIGLEY) 04 August 1998, see the whole reference.	1-16												
A,P	US 5,793,980 A (GLASER et al.) 11 August 1998, see the whole reference.	1-16												
A,P	US 5,787,412 A (BOSCH et al.) 28 July 1998, see the whole reference.	1-16												
A,P	US 5,826,025 A (GRAMLICH) 20 October 1998, see the whole reference.	1-16												
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.														
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>*A* document defining the general state of the art which is not considered to be of particular relevance</td> <td>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>*E* earlier document published on or after the international filing date</td> <td>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>*Z* document member of the same patent family</td> </tr> <tr> <td>*O* document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>*P* document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family	*O* document referring to an oral disclosure, use, exhibition or other means		*P* document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family													
O document referring to an oral disclosure, use, exhibition or other means														
P document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search 16 NOVEMBER 1998		Date of mailing of the international search report 28 JAN 1999												
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer J. ZARNI MAUNG <i>Jon</i> Telephone No. (703) 305-3900												

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/20022

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,586,311 A (DAVIES et al.) 17 December 1996, see the whole reference.	1-16